




Dmix International

MOBILE WORKSHOP WITH AERIAL PLATFORM

Layout

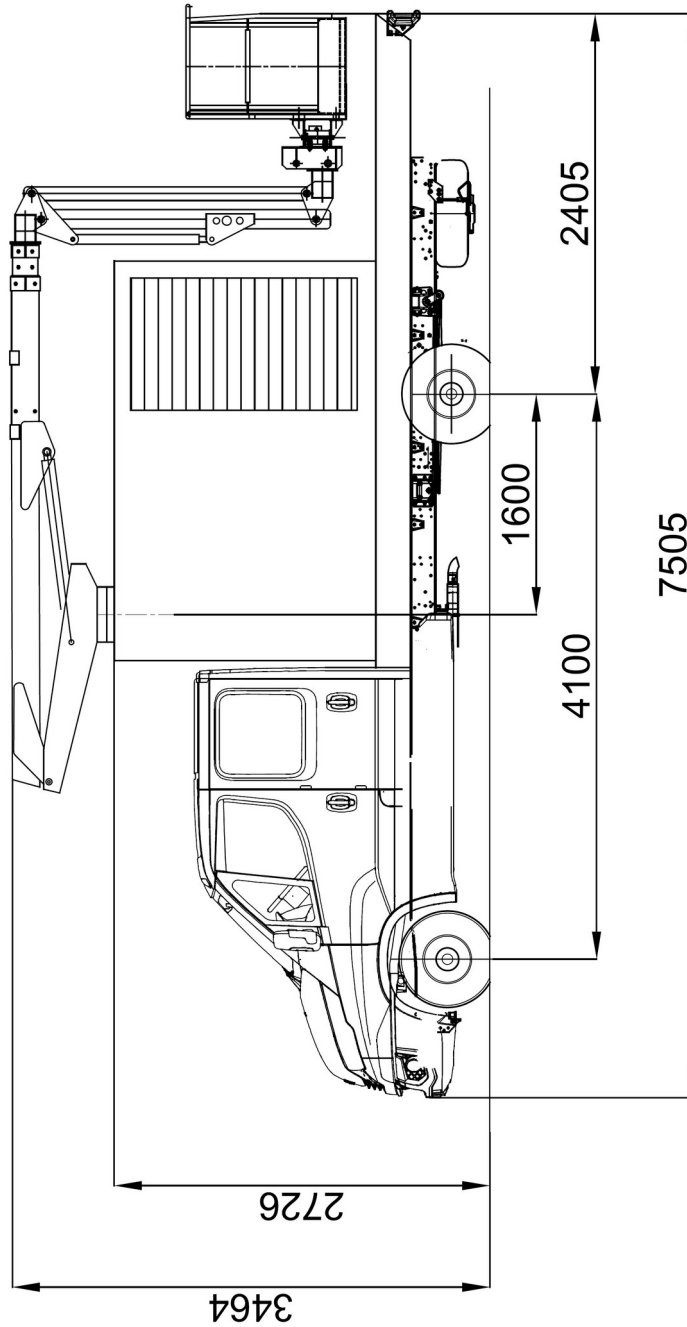

Dmix International S.R.L.S.

Viale Enzo Paolo Tiberi n° 8, 06124 PERUGIA (PG)

C.F./P.IVA 03610350542 REA PG301726



Dmix International

Technical Specifications of platform

Max. Working height 15 mt.

Basket floor height 13,5 mt.

Max. lateral outreach: 8 mt with max. Basket capacity.

Max. Basket capacity 205 kg.

- N° 2 Arms in high quality steel with conveyor jib 140° mounted on rear of vehicle
- Turret rotation 400°
- Fiberglass Basket (dimensions 1400x700x1100 mm) with antislip floor and water drain hose.
Equipped with: Platform control distributor, start/stop control for main engine.
All the controls on the platform.
- Basket rotating 60° + 60°
- Hydraulic Pump for platform
- 230 V AC socket
- Oil tank in steel with filter and level indicator
- 4 stabilizers, with automatic system that avoid to operated if the stabilizers are not correct positioned, and automatic system that avoid the stabilizers will closed if the basket is not in standby position.
- Emergency service through manual pump
- Automatic levelling system of basket
- Electrical Emergency operation of boom system, with electropump 24V
- Double-effect Block valve in each cylinder
- Working lights on basket
- Basket cabin intercom systems, it means System with microphone and loudspeaker in chassis cabin and headset and microphone in basket
- First layer and final layer of painting according with customer wishes, in high quality and non corrosive paint
- Sticker and plate for instructon and warning in english language where is necessary
- High resistance and quality steel subframe realized on IVECO Daily 70C15D

Dmix International s.r.l.s.

Viale Enzo Paolo Tiberi n° 8, 06124 PERUGIA (PG)

C.F./P.IVA 03610350542 REA PG301726



Dmix International

Technical specification of Mobile Workshop

Superstructure

- Heavy duty sub-frame made of high quality steel.
- Sandwich construction with insulation for hot climate, floor covered with multilayer wood, small openable windows with protections, one on both sides, device for grounded with cable 5m length.
- Electrical panel with switches and sockets
- Cable reel 20 mt with 2 electrical sockets 220 V
- Portable lamp with cable 10 m length with automatic spring operated reel
- Roof of workshop can be walkable
- On the driver side will be an openable roll-up alluminum door, with easy access ladder
- Internal lighting by neon or LED lamps

Body external dimensions:

- Length: approx 2900 mm
- Width: approx 2200 mm
- Height: approx 1900 mm

Equipped with:

- No 1 5 kg CO2 fire extinguisher with fixing inside body
- No 1 Water Tank 20 Litres
- No 1 Fuel Tank 20 Litres
- No 1 Paper Holder, for mechanics
- No 2 Rear mudguards
- No 1 Lockable tool box
- No 1 Spare Wheel
- No 1 Work bench 1,5 m long with drawers and multiplex work top 20 mm provided with socket and over head lamps (Made in Italy, EU).
- No 1 Shelves cabinet (Made in Italy, EU).
- No 1 Welding machine 160 amp with mask, welding glass, electrodes, brushes, goggles, clamps and cables and accessories (Made in Italy, EU).
- No 1 Air compressor (model MK 102-90-2M)150 l/min, 10 bar with automatic hose reel 20 m & accessories, tank capacity 90 LT.(Made in Italy, EU).
- No 1 11 kVA (9.9 kW) / 230 V / 47.8 A, generator three phase synchronous alternator gasoline engine (Made in Italy, EU).
- No 1 Drilling bench machine (Made in Italy, EU).

Dmix International s.r.l.s.

Viale Enzo Paolo Tiberi n° 8, 06124 PERUGIA (PG)

C.F./P.IVA 03610350542 REA PG301726




Dmix International

- No 1 Hydraulic Press 6 ton mounted on bench
- No 1 Electrical pipe cutter for metal sheet and pipe
- No 1 Hammer drill for holes into concrete up to 16 mm
- No 1 Rigid Pipe threading tool in a box complete with 4 threading heads for pipes ($\frac{1}{2}$, $\frac{3}{4}$, 1, 1 $\frac{1}{2}$ inches)
- No 1 Double wheel grinding bench machine (Made in Italy, EU).
- No 1 Hand drill 1 to 13 mm with twist drill set & accessories (Made in Italy, EU).
- No 1 Small grinder 125 mm disc & accessories (Made in Italy, EU).
- No 1 Angle grinder with 230 mm disc & accessories
- No 1 Hydraulic jacks bottle type: 20 tons
- No 1 Oxygen/acetylene welding with cutting set, 10 m hoses, flashback arrestor, pressure regulator & accessories (gas cylinders with track cannot be supplied from Italy due to forbid of transportation) (Made in Italy, EU).
- No 1 Battery charger with starting 12/24V (Made in Italy, EU).
- No 1 Set Tools for pulling & clamping (Made in Italy, EU).
- No 1 120 mm bench vice (Made in Italy, EU).
- No 1 Cleaning, lubricating measuring tools (Made in Italy, EU).
- No 1 Tyre inflating gauge (Made in Italy, EU).
- No 1 Digital AVO Meter
- No 1 Forge Spike
- Cable lug press size 2,5 – 25 mm)
- Circular rasp
- Portable electrical automotive tester
- Heavy duty tools assortment (ANNEX A Made in Italy).

Dmix International S.R.L.S.

Viale Enzo Paolo Tiberi n° 8, 06124 PERUGIA (PG)

C.F./P.IVA 03610350542 REA PG301726




Dmix International

ANNEX A TOOLS KIT FOR MOBILE WORKSHOP

The pictures are only for illustration and can be look diferent from the tools we will supply

SCREWDRIVER FOR SLOTTED HEAD SCREWS-MECHANIC - chrom-vanadium-molybdenum steel chrome plated black finish tip

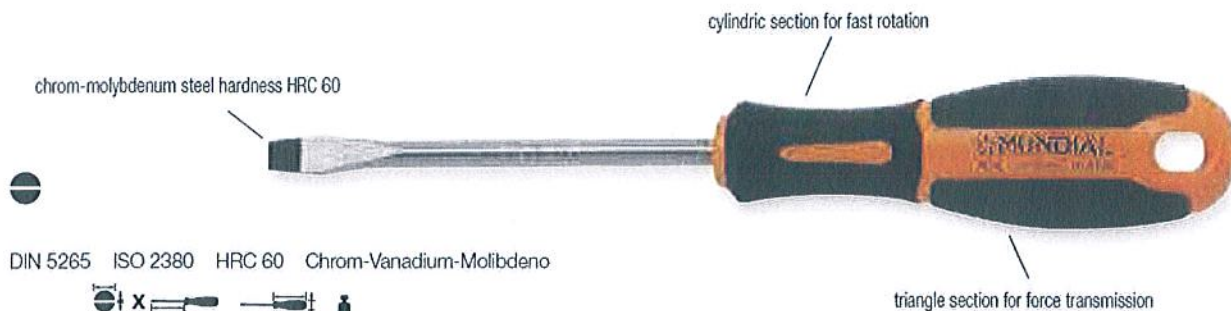

DIN 5265 ISO 2380 HRC 60 Chrom-Vanadium-Molibdeno

	Tip	Length	Width	Weight
0050.307	3,0 x 0,5 x 75	87,5 x 25,4	30	
0050.410	4,0 x 0,8 x 100	109 x 31,7	64	
0050.510	5,5 x 1,0 x 100	109 x 31,7	72	
0050.612	6,5 x 1,2 x 125	117 x 34,0	94	
0050.815	8,0 x 1,2 x 150	127 x 36,9	125	

SCREWDRIVER FOR PHILLIPS CROSS HEAD SCREWS - chrom-vanadium-molybdenum steel chrome plated black finish tip

DIN 5262 ISO 8764 HRC 60

	Tip	Length	Width	Weight
0052.006	PH 0 x 60 x 3,0	87,5 x 25,4	30	
0052.108	PH 1 x 80 x 4,5	109 x 31,7	68	
0052.210	PH 2 x 100 x 6,0	117 x 34,0	92	



SCREWDRIVER FOR SLOTTED HEAD SCREWS-MECHANIC - chrom-vanadium-molybdenum steel chrome plated black finish tip

DIN 5265 ISO 2380

	Tip	Length	Width	Weight
0055.603	6,5 x 1,0 x 38	55 x 32	36	



SCREWDRIVER FOR PHILLIPS CROSS HEAD SCREWS - chrom-vanadium-molybdenum steel chrome plated black finish tip

DIN 5262 ISO 8764

	Tip	Length	Width	Weight
0056.103	PH 1 x 38 x 4,5	55 x 32	34	




SCREWDRIVER FOR TORX WITH HOLE HEAD SCREWS - chrom-vanadium-molybdenum steel chrome plated black finish tip

HRC 60

	Tip	Length	Width	Weight
0075.060	TX 6 x 60	87,5 x 25,4	28	
0075.070	TX 7 x 60	87,5 x 25,4	28	
0075.080	TX 8 x 60	87,5 x 25,4	30	
0075.090	TX 9 x 60	109 x 31,7	56	
0075.100	TX 10 x 80	109 x 31,7	58	
0075.150	TX 15 x 80	109 x 31,7	60	
0075.200	TX 20 x 100	109 x 31,7	62	
0075.250	TX 25 x 100	109 x 31,7	70	
0075.270	TX 27 x 100	109 x 31,7	66	
0075.300	TX 30 x 100	117 x 34,0	88	



Dmix International s.r.l.
Via Enzo Paolo Tiberi n° 8
06124 PERUGIA (PG)
C.F./P.IVA 03610350542 REA PG301726




Dmix International

COMBINATION WRENCH - chrom-vanadium steel chrome plated finish polish heads

DIN 3113 ISO 7738

Icon	●	↔	Sp.†	Icon
1030.060	6-6	104 10,5 14,5	3,5-5,2	20
1030.070	7-7	113 12 17	4-6	24
1030.080	8-8	125 13,7 18	4-6	32
1030.090	9-9	134 15 20	4,2-6,5	32
1030.100	10-10	142 16 20	4,2-7	42
1030.110	11-11	155 18 24	5-9	60
1030.120	12-12	160 19 27	5-9	58
1030.130	13-13	174 20 28	5-9	82
1030.140	14-14	182 22 30	5-9	84
1030.150	15-15	192 23 31	5,5-10	102
1030.160	16-16	206 25 34	6-10	114
1030.170	17-17	210 26 35	6,5-10,5	136
1030.180	18-18	210 28 38	6,5-10,5	144
1030.190	19-19	235 29 39	7-11	182
1030.200	20-20	235 30 41	7-11,5	180
1030.220	22-22	260 33 40	8-13	270
1030.240	24-24	282 36 48	9-13	298
1030.270	27-27	300 40 54	10-14	380
1030.300	30-30	330 45 61	11-16	480
1030.320	32-32	364 45 61	11-16	542



SET 9 HEXAGONAL MALE WRENCHES - plastic clip

Contenuto-content:


0345.015 1,5
 0345.020 2
 0345.025 2,5
 0345.030 3
 0345.040 4
 0345.050 5
 0345.060 6
 0345.080 8
 0345.100 10



DOUBLE ENDED OPEN WRENCH - chrom-vanadium steel chrome plated finish polish heads

DIN 3110 ISO 10102

Icon	●	↔	Sp.†	Icon
1020.067	6-7	122 15 17	3,6 20	
1020.089	8-9	140 20 22	4,0 33	
1020.101	10-11	157 24 26	4,4 48	
1020.123	12-13	172 28 30	5,0 65	
1020.145	14-15	190 32 34	5,4 85	
1020.167	16-17	205 36 38	5,8 120	
1020.189	18-19	222 39 41	6,3 162	
1020.202	20-22	236 43 47	7,0 214	



Dmix International s.r.l.s.

Via Enzo Paolo Tiberi n° 8
 06124 PERUGIA (PG)

C.F./P.IVA 03610350542 REA PG301726



Dmix International

SOCKET 1/4" HEXAGON FLANK DRIVE SECTION - chrom-vanadium steel chrome plated finish

DIN 3124 ISO 2725

Icon	Hex Size	Length	Width	Height	Weight
	4	25	6,7	12	10
	4,5	25	7,3	12	11
	5	25	8	12	11
	5,5	25	8,5	12	12
	6	25	9	12	12
	7	25	10	12	12
	8	25	11,8	12	12
	9	25	12,5	12	14
	10	25	14	12	14
	11	25	15,5	14	20
	12	25	17	15	22
	13	25	18	16	25

1/4"



SOCKET 1/4" - hexagon male

1/4"

Icon	Hex Size	Length	Weight
	3	33	13
	4	33	13
	5	33	14
	6	33	15
	8	33	17



SOCKET 1/4" - hexagon male

1/4"

Icon	Hex Size	Length	Weight
	TX 8	33	12
	TX 10	33	13
	TX 15	33	13
	TX 20	33	14
	TX 25	33	14
	TX 27	33	13
	TX 30	33	14
	TX 40	33	14



SET 9 LONG SPHERICAL END HEXAGONAL WRENCHES - plastic clip

Contenuto-content:

0350.015	1,5	0350.030	3	0350.060	6	
0350.020	2	0350.040	4	0350.080	8	
0350.025	2,5	0350.050	5	0350.100	10	



0351.090



SET 9 LONG TORX WRENCHES WITH HOLE - plastic clip

Contenuto-content:

0361.100	10	0361.300	30	
0361.150	15	0361.400	40	
0361.200	20	0361.450	45	
0361.250	25	0361.500	50	
0361.270	27			



0366.090

346



Dmix International s.r.l.

Via Enzo Paolo Tiberi n° 8
06124 PERUGIA (PG)

C.F./P.IVA 03610350542 REA PG301726



Dmix International

RATCHET 1/4" REVERSIBLE QUICK RELEASE - chrom-vanadium steel chrome plated finish - plastic handle

1/4"

1405.010	140	23 x 25,5	60	118
----------	-----	-----------	----	-----



EXTENSION BAR 1/4" - chrom-vanadium steel chrome plated finish

1/4"

DIN 3122 ISO 3315

1408.075	75	33
1408.150	150	66



SLIDING "T" BAR 1/4" - chrom-vanadium steel chrome plated finish

1/4"

DIN 3322 ISO 3315

1410.010	115	44
----------	-----	----



Dmix International s.r.l.s.

Via Enzo Paolo Tiberi n° 8

06124 PERUGIA (PG)

C.F./P.IVA 03610350542 REA PG301726

UNIVERSAL JOINT 1/4" - chrom-vanadium steel chrome plated finish

1/4"

DIN 3123 ISO 3316

1412.010	41	26
----------	----	----




SOCKET 1/2" HEXAGON FLANK DRIVE SECTION - chrom-vanadium steel chrome plated finish

DIN 3124 ISO 2725

Part No.	Size	W	L	H	W
1500.080	8	38	13,0	22	48
1500.090	9	38	14,0	22	48
1500.100	10	38	15,0	22	48
1500.110	11	38	16,8	22	50
1500.120	12	38	17,9	22	52
1500.130	13	38	18,7	22	52
1500.140	14	38	20,0	22	55
1500.150	15	38	21,8	21	56
1500.160	16	38	22,0	21	49
1500.170	17	38	23,0	22	63
1500.180	18	38	25,8	24	76
1500.190	19	38	25,8	24	67
1500.200	20	38	27,8	26	87
1500.210	21	38	29,3	26	82
1500.220	22	38	30,0	28	96
1500.240	24	38	32,0	29	105
1500.270	27	42	36,0	31	150
1500.300	30	42	38,0	34	188
1500.320	32	42	42,0	38	210

1/2"





Dmix International

RATCHET 1/2" REVERSIBLE QUICK RELEASE - chrom-vanadium steel chrome plated finish - plastic handle

1/2"

DIN 3122 ISO 3315

1505.010	254	41,5 x 39	96	563



EXTENSION BAR 1/2" - chrom-vanadium steel chrome plated finish

1/2"

DIN 3123 ISO 3316

1508.125	125	197
1508.250	250	388



SLIDING "T" BAR 1/2" - chrom-vanadium steel chrome plated finish

1/2"

DIN 3122 ISO 3315

1510.010	250	360



UNIVERSAL JOINT 1/2" - chrom-vanadium steel chrome plated finish

1/2"

DIN 3123 ISO 3316

1512.010	70	137



HAMMER FOR MECHANIC - carbon steel - varnished finish - wooden handle

DIN 1041

	Gr.		
0377.030	300	300	377



MALLET WITH POLYURETHANE HEAD - wooden handle

UNI 7784

	Ø		
0370.035	35	310	408



CENTRE PUNCH FOR MECHANIC - chrom-vanadium steel chrome plated finish

DIN 7250

0616.015	13	150	114



CHISEL FOR MECHANIC - chrom-vanadium steel chrome-plated finish

DIN 6453

0612.016	12	150	142




Dmix International s.r.l.s.

Via Enzo Paolo Tiberi n° 8

06124 PERUGIA (PG)

C.F./P.IVA 03610350542 REA PG301726



Dmix International

CUTTER WITH DIAGONAL CUTTING - chrom-vanadium steel chrome plated finish

Insulated bicomponent soft handle in rubber-pvc

DIN ISO 5749

0412.916	160	20	230



COMBINATION PLIERS - chrom-vanadium steel chrome plated finish

Insulated bicomponent soft handle in rubber-pvc

DIN ISO 5746

0440.918	180	5.8 x 10.0	36.5
			264



HALF NOSE PLIERS WITH CUTTER - chrome

0463.916	170	3 x 2,5	61
			154



LOCK-GRIP PLIERS CONCAVE JAWS

chrom-vanadium steel nickel plated finish

0474.025	250	610



WATERPUMP JOINT BOX PLIERS - chrom-vanadium steel varnished finish - plastic handle

DIN ISO 8976

0490.024	240	300




HEXAGONAL MALE WRENCH WITH "T" BICOMPONENT HANDLE - chrom-vanadium steel chrome plated finish

0344.020	2,0 x 100	140 x 65	14
0344.025	2,5 x 100	140 x 65	14
0344.030	3,0 x 100	145 x 65	22
0344.040	4,0 x 150	210 x 90	57
0344.050	5,0 x 150	210 x 90	72
0344.060	6,0 x 150	210 x 90	88
0344.080	8,0 x 160	230 x 115	178



HEXAGONAL MALE THREE ENDS WRENCH SLIDING BAR - chrom-vanadium steel chrome plated black finished tips

0344.320	2,0	65 x 130	22
0344.325	2,5	65 x 130	22
0344.330	3,0	65 x 150	22
0344.340	4,0	90 x 180	64
0344.350	5,0	90 x 180	66
0344.360	6,0	105 x 215	134
0344.380	8,0	125 x 250	224

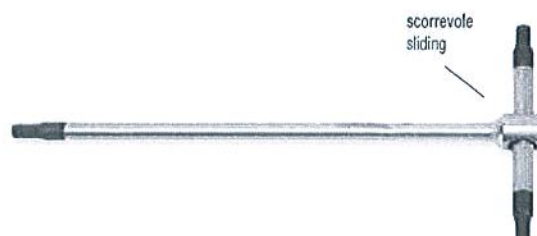

Dmix International s.r.l.s.

Via Enzo Paolo Tiberi n° 8

06124 PERUGIA (PG)






C.F./P.IVA 03610350542 REA PG301726



Dmix International

EXTERNAL LOCK RING PLIERS-STRAIGHT - chrom-vanadium steel - plastic handle






DIN 5254A

				
0505.018	180	19 ÷ 60	1,8	180



EXTERNAL LOCK RING PLIERS-BENT - chrom-vanadium steel - plastic handle






DIN 5254B

				
0506.017	170	19 ÷ 60	1,8	180



INTERNAL LOCK RING PLIERS-STRAIGHT - chrom-vanadium steel - plastic handle

DIN 5256C

				
0510.018	180	19 ÷ 60	1,8	166







INTERNAL LOCK RING PLIERS-BENT - chrom-vanadium steel - plastic handle

DIN 5256D

				
0511.017	170	19 ÷ 60	1,8	156






ANGLE OPEN SOCKETS WRENCH - HEXAGON - BIHEXAGON

			
1098.080	8-8	113 34	89
1098.090	9-9	122 35	86
1098.100	10-10	131 40	114
1098.110	11-11	138 40	125
1098.130	13-13	162 44	192
1098.140	14-14	170 46	204
1098.170	17-17	190 52	306
1098.190	19-19	210 59	442



COMBINATION FLEX RATCHET WRENCH


72 teeth - 5° action

			
1055.080	8-8	145	50
1055.100	10-10	155	66
1055.110	11-11	165	85
1055.120	12-12	180	117
1055.130	13-13	180	114
1055.140	14-14	190	136
1055.170	17-17	222	227
1055.190	19-19	240	250



Dmix International s.r.l.s.


Via Enzo Paolo Tiberi n° 8
06124 PERUGIA (PG)
C.F./PIVA 03610350542 REA PG301726



Dmix International

AMERICAN PATTERN TIN SNIP - polished finish steel - plastic handle

0560.025	250	456

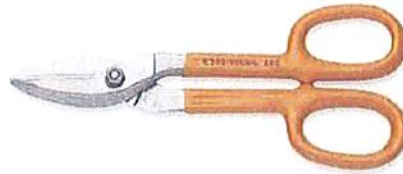

ADJUSTABLE WRENCH - chrom-vanadium steel chrome plated finish - plastic handle

DIN 3117 ISO 6787

1070.015	150	19	152
1070.020	200	24	274



SCISSORS FOR ELECTRICIANS - bicomponent inox

0683.010	145	98



SET 6 CHISELS AND DRIFT PUNCHES - envelope

Contenuto-content:

0612.013	125	0615.200	2
0612.016	150	0615.400	4
0614.013	125	0616.012	125

0620.010	490	530	6



Dmix International S.r.l.s.

Via Enzo Paolo Tiberi n° 8
06124 PERUGIA (PG)

C.F./P.IVA 03610350542 REA PG301726

WRENCH "T" HANDLE LONG - CARDANIC - chrom-vanadium steel chrome plated finish

1150.080	8	400	184
1150.100	10	440	292
1150.130	13	460	392
1150.170	17	500	590





Compressore bicilindrico monostadio traino cinghia lubrificato, con motore da 1,5 kW. Disponibile con serbatoio da 90 a 270 litri. Serbatoi carrellati per facilitare il trasporto. Pressostato elettomeccanico, riduttore di pressione con manometro e rubinetto rapido universale. Protezione da sovraccarico del motore elettrico a riarmo manuale.

lubricated belt-driven single-stage two-cylinder compressor with engine of 1.5 kW. Available with tank from 90 to 270 litres. Wheeled tanks to simplify the transport. Electro-mechanical pressure switch, pressure reducer with manometer and universal quick coupler. The electric motor features overload protection with manual reset.

Ölgeschmierter, keilriemengetriebener, einstufiger Zweizylinder Kompressor mit Leistungen von 1,5 kW. Verfügbar von 90 bis 270 Liter Behälter. Tank auf Rädern für einfachen Transport. Elektromechanischer Druckschalter, Druckminderer mit Manometer und Universell-Schnelltrennkupplung. Der Elektromotor besitzt einen Überlastschutz.



MK 113-270-4



MK 103-90-3

Dmix International s.r.l.s.

Via Enzo Paolo Tiberi n° 8

06124 PERUGIA (PG)

C.F./PIVA 03610350542 REA PG301726

Codice Code	Prodotto Product	L x P x A (mm)	litri	kg	dB	mA	Barcode
BMGC404FNM507	MK 102-90-2M	118 x 46 x 94	70	154,3	-	8017750231983	
BNGC504FNM505	MK 103-90-3M	118 x 46 x 94	80	176	-	8017750232010	
BMGC441FNM508	MK 102-90-2	118 x 46 x 94	73	160,6	-	8017750232263	
BNGC541FNM506	MK 103-90-3	118 x 46 x 94	82,5	181,5	-	8017750232072	
BPGC601FNM867	MK 113-90-4	126 x 46 x 101	87,5	192,5	-	8017750232294	
BNHC504FNM509	MK 103-150-3M	148 x 48 x 107	110	242	-	8017750232102	
BNHC541FNM510	MK 103-150-3	148 x 48 x 107	92,5	203,5	-	8017750232096	
BNLC504FNM515	MK 103-200-3M	160 x 52 x 105	122,5	269,5	-	8017750232126	
BNLC541FNM516	MK 103-200-3	160 x 52 x 105	108,5	238,7	-	8017750232133	
BPLC601FNM870	MK 113-200-4	160 x 52 x 105	119	261,8	-	8017750175737	
BPLC701FNM835	MK 113-200-5,5	160 x 52 x 105	125	275	-	8017750175744	
BPNC601FNM879	MK 113-270-4	170 x 56 x 121	142	312,4	-	8017750175775	
BPNC701FNM880	MK 113-270-5,5	170 x 56 x 121	148	326,6	-	8017750175782	
BPNN601FNM850	MK 113-270F-4	170 x 56 x 121	136	299,2	-	8017750175799	

Codice Code	Prodotto Product	L	P	A	litri	kg	dB	mA	mA	mA	mA	mA	mA	mA	mA	mA	mA
90 BMGC404FNM507	MK 102-90-2M	230	1	1,5	2	MK102	235	14,1	8,3	10	145	1040	2	1	76	92	107 x 45 x 77 61,5 135,6
90 BNGC504FNM505	MK 103-90-3M	230	1	2,2	3	MK103	365	21,9	12,9	10	145	1375	2	1	79	93	107 x 47,5 x 78 67,5 148,8
90 BMGC441FNM508	MK 102-90-2	400	3	1,5	2	MK102	235	14,1	8,3	10	145	1040	2	1	76	92	107 x 47,5 x 77 64,5 142,2
90 BNGC541FNM506	MK 103-90-3	400	3	2,2	3	MK103	365	21,9	12,9	10	145	1375	2	1	79	93	107 x 47,5 x 78 70 154,3
90 BPGC601FNM867	MK 113-90-4	400	3	3	4	MK113	500	30	17,7	10	145	1300	2	1	78	97	107 x 47,5 x 87 75 165,3
150 BNHC504FNM509	MK 103-150-3M	230	1	2,2	3	MK103	365	21,9	12,9	10	145	1375	2	1	79	93	133 x 50 x 89 97,5 214,9
150 BNHC541FNM510	MK 103-150-3	400	3	2,2	3	MK103	365	21,9	12,9	10	145	1375	2	1	79	93	133 x 49 x 89 80 176,4
200 BNLC504FNM515	MK 103-200-3M	230	1	2,2	3	MK103	365	21,9	12,9	10	145	1375	2	1	79	93	146 x 55 x 95 103,5 228,2
200 BNLC541FNM516	MK 103-200-3	400	3	2,2	3	MK103	365	21,9	12,9	10	145	1375	2	1	79	93	146 x 55 x 95 90 198,4
200 BPLC601FNM870	MK 113-200-4	400	3	3	4	MK113	500	30	17,7	10	145	1300	2	1	78	97	146 x 55 x 98 100,5 221,6
200 BPLC701FNM835	MK 113-200-5,5	400	3	4	5,5	MK113	556	33,4	19,6	10	145	1445	2	1	81	-	146 x 55 x 98 106,5 234,8
270 BPNC601FNM879	MK 113-270-4	400	3	3	4	MK113	500	30	17,7	10	145	1300	2	1	78	97	155 x 59 x 110 120,5 265,7
270 BPNC701FNM880	MK 113-270-5,5	400	3	4	5,5	MK113	556	33,4	19,6	10	145	1445	2	1	81	-	155 x 59 x 110 126,5 278,9
270 BPNN601FNM850	MK 113-270F-4	400	3	3	4	MK113	500	30	17,7	10	145	1300	2	1	78	97	155 x 50 x 103 114,5 252,4














GENERATING SET GE 11000 HBS/GS


FEATURES

- Engine shut down for low oil level
- Suitable for electronic equipments
- Sockets: 1x230V 32A 2P+T CEE - 1x230V 16A 2P+T CEE
1x230V 16A 2P+T SCHUKO
- ELCB-GFI (Ground Fault Interruptor)
- Circuit breaker
- Protective frame
- Meets EC directives



The images are for reference

Standard Equipment											
	Petrol engine	Air cooling	Electric Starter	Battery 12V	Oil pressure Indicator	Engine shut down (oil)	Hours-meter				
											
	Synchronous alternator	Sockets	ELCB-GFI	Circuit breaker	Thermal shut off	Voltmeter					

-  Options on request
- Earthing kit
 - Hand trolley CTM10

Technical data GE 11000 HBS/GS

A.C. GENERATION - 50 Hz - *Single-Phase synchronous alternator, self-excited, self-regulated, brushless*

* Stand-by single-phase power	11 kVA (9.9 kW) / 230 V / 47.8 A
* PRP single-phase power	10 kVA (9 kW) / 230 V / 43.5 A
Cos φ	0.9
Insulation class	H

* Output powers according to ISO 8528-1

ENGINE - 4-stroke petrol, OHV, Air cooling

Model	Honda GX 630
* Stand-By net power	14.5 kW (19.7 HP)
* PRP net power	10.5 kW (14.3 HP)
Cylinders/ Displacement	2/ 688 cm ³
Speed	3000 rpm
Fuel consumption (75% of PRP)	3.9 l/h

* Powers according to SAE J1349

GENERAL SPECIFICATIONS

Tank capacity	18 l
Running time (75% of PRP)	4.5 h
IP protection degree	IP 23
*Dimensions LxIhx (mm)	935x525x645
*Dry weight	145 kg
**Acoustic power LwA (pressure LpA)	99 dB(A)(74 dB(A) @ 7m)

* Dimensions and weight without trolley/trailer. / **For fixed installation only in the EU market

Dmix International s.r.l.

Via Enzo Paolo Tiberi n° 8
06124 PERUGIA (PG)
C.F./P.IVA 03610350542 REA PG301726