

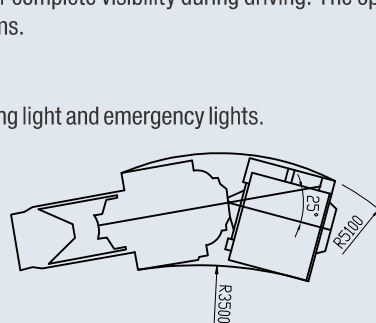


Self loading Mixer D-1 (Concrete output 1.0 cbm)

Engine	Engine Lombardini Diesel, 3 cylinders, 39,44 HP water-cooled
Transmission	Hydrostatic 2 speeds, electro hydraulic control for slow and fast speed from 0 to 14 kmph (forward and reverse)
Traction	4 wheel drive
Steering	Hydraulic Power assisted operated through independent gear pump.
Differentials	Totally enclosed oil-bath disc brakes
Parking Brake	Mechanical, hand operated
Starting	Electric 12 V
Effective Yield	1.0 cbm
Drum Volume	1.5 cbm
Loading	Self-loading shovel capacity 150 litres.
Discharge Concrete	Rapid discharge of the concrete by hydraulic drum tilting for fast and complete discharge even on inclines.
Typical Output	4 – 5 cbm/hr
Drum Rotation Adjustment	By hydraulic control, Maximum Drum rotation: 0 - 22 rpm. Infinitely variable for mixing & discharge
Water Equipment	Self-priming pump 180 lt/min and flow meter batching
Water Tank	230 litres
Driver Seat	Reversible 180° with protection roof for complete visibility during driving. The operator can face loading side during weigh batching and discharge operations.
Tyres	10.0 / 75 - 15.3 - 10 PR, Pressure 4 bar
Rim Size	15"
Lights Equipment	Complete with head / tail lights, revolving light and emergency lights.
Ground Clearance	230 mm
Articulation Angle	25° on both side
Gradeability	30°
Fuel Tank	27 litres
Hydraulic Tank	70 litres
Net Vehicle Weight	2510 kgs
Gross Vehicle Weight	5360 kgs
Accessories on Demand	High pressure washing system Additional Chute Electronic batching unit with printer Fire Extinguisher 3 kg First aid kit Emergency triangle Spare wheel

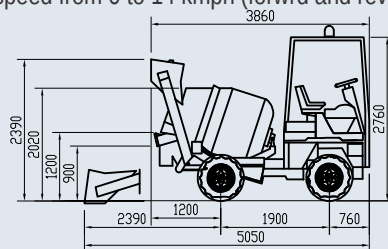

Self loading Mixer D-2.5 (Concrete output 2.5 cbm)

Engine Transmission

FPT Diesel Engine, 4 cylinder, 83 HP water cooled

Hydrostatic 4 Speeds Automotive, electro hydraulic control for slow & fast speed from 0 to 24 kmph (forward & reverse)

Traction Steering

4 wheel drive

T- Way system. Four wheel steering for maneuvering in close spaces.

Opposite wheels steering for side maneuvering.

Differentials Parking Brake

Totally enclosed oil-bath disc brakes

Starting

Mechanical, hand operated

Effective Yield

Electric 12 V

Drum Volume

2.5 cbm

Loading

3.5 cbm

Typical Output

Self-loading shovel capacity 600 litres.

Discharge Concrete

10 - 12 cbm/hr

Adjustment of Drum Rotation

Rapid discharge of the concrete by hydraulic drum tilting for fast and complete discharge even on inclines.

Water System

By hydraulic control, Maximum Drum rotation: 0 - 22 rpm. Infinitely variable for mixing & discharge

Water Tank

Self-priming pump 220 lt/min and flow meter batching

Driver Seat

500 litres.

Reversible 180° with protection roof for complete visibility during driving.

The operator can face loading side during weigh batching and discharge operations.

Tyres

12.5 / 80 - 18 - 16 PR, Pressure 5 bar

Rim Size

18"

Lights Equipment

Complete with head / tail lights, revolving light and emergency lights.

Ground Clearance

330 mm

Gradeability

30°

Fuel Tank

100 litres

Hydraulic Tank

150 litres

Net Vehicle Weight




5350 kgs

Gross Vehicle Weight

11000 kgs

Accessories on Demand

High pressure washing system | Additional Chute | Electronic batching unit with printer | Slewing Drum Arrangement | Fire Extinguisher 3 kg | First aid kit | Emergency triangle | Spare wheel

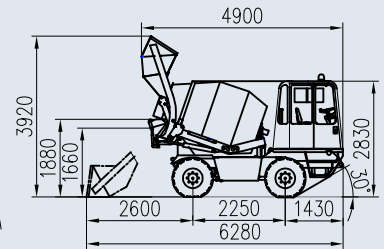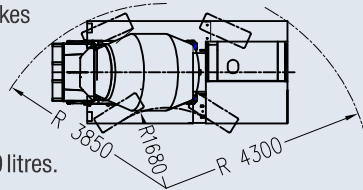

Self loading Mixer D-4 (Concrete output 4.0 cbm)

Engine
Transmission

FPT Diesel Engine, 4 cylinder, 126 HP water cooled
Hydrostatic 4 Speeds Automotive, electro hydraulic control for slow and fast speed from 0 to 27 kmph (forward and reverse)

Traction
Steering

4 wheel drive
T-Way system. Four wheel steering for maneuvering in close spaces.
Opposite wheels steering for side maneuvering.

Differentials
Parking Brake
Starting

Totally enclosed oil-bath disc brakes
Mechanical, hand operated
Electric 12 V

Concrete Output
Drum Volume

4.0 cbm
5.5 cbm

Loading

Self-loading shovel capacity 610 litres.

Discharge Concrete

Rapid discharge of the concrete by hydraulic drum tilting for fast & complete discharge even on inclines.

Typical Output

14 - 16 cbm/hr

Adjustment of Drum Rotation

By hydraulic control, Maximum Drum rotation: 0 - 22 rpm. Infinitely variable for mixing & discharge

Water System

Self-priming pump 220 lt/min and flow meter batching

Water Tank

720 litres.

Driver Seat

Reversible 180° with protection roof for complete visibility during driving.

The operator can face loading side during weigh batching and discharge operations.

Complete with head / tail lights, revolving light and emergency lights.

Lights Equipment

Tyres

16.0 / 70 - 20 - 14 PR, Pressure 5 bar

Rim Size

20"

Ground Clearance

355 mm

Gradeability

32°

Fuel Tank

100 litres

Hydraulic Tank

150 litres

Net Vehicle Weight

7150 kgs

Gross Vehicle Weight

16800 kgs

Accessories on Demand

High pressure washing system | Additional Chute | Electronic batching unit with printer | Slewing Drum Arrangement | Fire Extinguisher 3 kg | First aid kit | Emergency triangle | Spare wheel

