



Technical specification

Equipment type

Low loader semi-trailer with hydraulic neck 80 ton capacity

Dimensions & weights	
Full length:	15600mm
Bed length:	7350mm
Total Bed length (bed + axles zone):	12000mm
Width:	3000mm
King pin height:	1400mm
Tare approx:	18000kg
Gross weight:	83000kg

CHASSIS

Lateral bed profile in profile 450, axles area in UPN350 Certified 3.5" king-pin, removable (includes 2" King pin)

NECK

Hydraulic neck for bed access, electro hydraulically operated Anti-fall valves on the hydraulic cylinders Covered in 5/7 steel plate

BED

Covered in 5/7 steel plate Folding wideners (wood for wideners not provided) Manual rear landing gear Structure with twist locks for 20" and 40" feet containers.

SUSPENSION & AXLES: 3x 16Ton axles, double Wheel Mechanical (leaf) suspension

BRAKES: Drum brakes

ELECTRICAL SYSTEM: Electric system according to CE and ADR regulations (certification not included) Multifunction aft lights Lateral lighting Third braking light

WHEELS & TIRES: 13x complete wheels (including spare) with 12R22.5 Continental tires

PAINTING: 2x anticorrosion primary coats, and 2x coats painted in a RAL color to be selected by customer


ACCESSORIES: 2x wheel chocks 2x spare wheel supports 10x latching rings 4x 7Tons lacting rings Lighter plug in the back Toolbox in the aft side

Dmix International AnIA.

Viale Enzo Paolo Tiberi n° 8, 06124 PERUGIA (PG) C.F/P.IVA 03610350542 REA PG301726



Dmix International

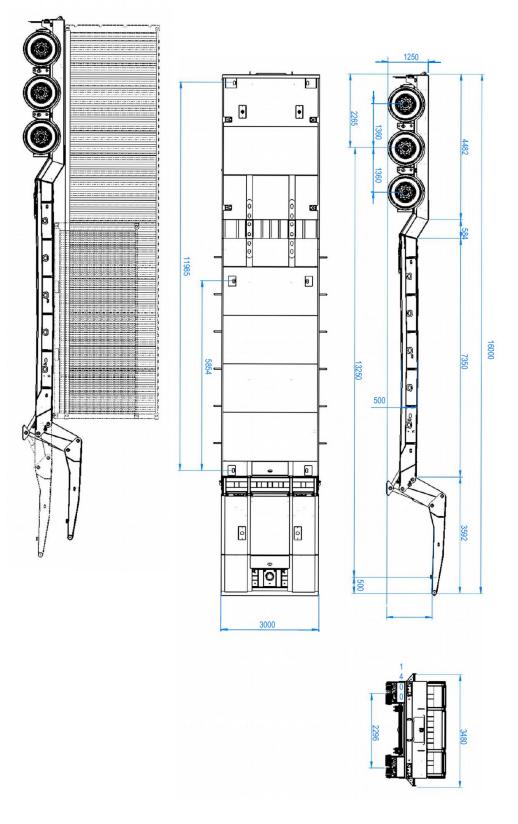


Dmix International Art.A.

Viale Enzo Paolo Tiberi n° 8, 06124 PERUGIA (PG) C.F/P.IVA 03610350542 REA PG301726



Dmix International

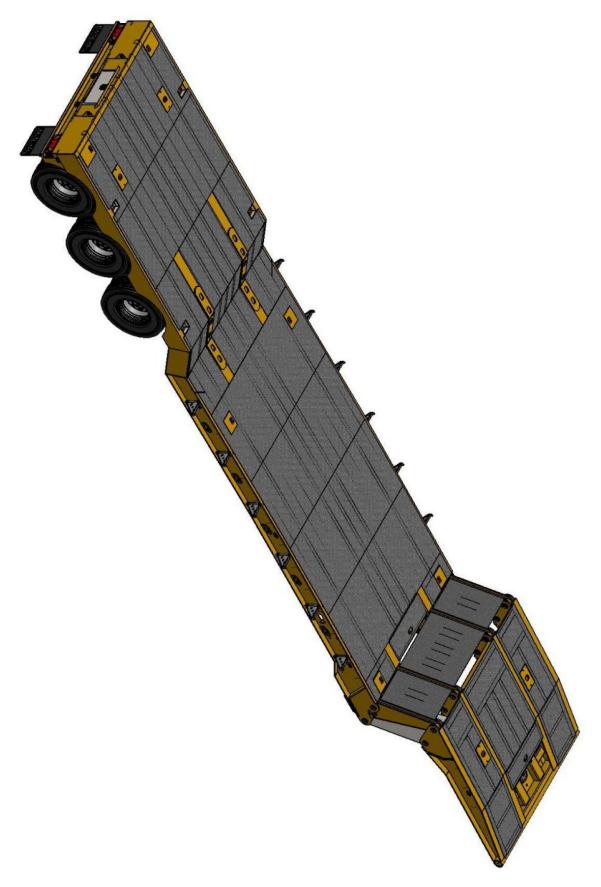



Viale Enzo Paolo Tiberi n° 8, 06124 PERUGIA (PG) C.F/P.IVA 03610350542 REA PG301726